


P/G4280FS = 42U



FRONT TEMPERED GLASS DOOR OR FULLY PERFORATED DOOR

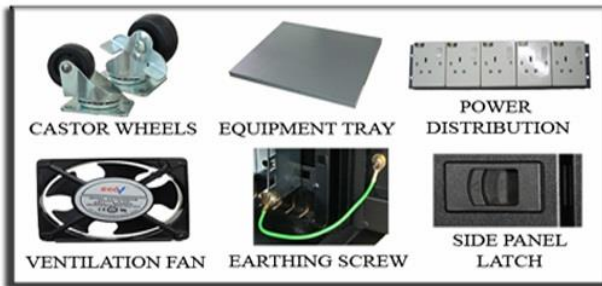

FEATURES:

- Simple and sturdy design
- Front tempered glass door with side perforation or Arc fully perforated door to enhance ventilation
- Fully perforated rear door for maximising ventilation
- Easy to dismantle front/ rear/ side doors to enable convenient operation
- Comprehensive range of sizes available
- Colour - Fully epoxy powder coated
- Can be supplied CKD

ACCESSORIES:

- Power distribution unit: Horizontal 19" rack mountable in 1U height
- Shelves: Heavy duty shelves for equipment up to 60kg
 - Cantilever shelf - available in 2U
 - Sliding shelf
 - Vented shelf
- Cooling fan
- Levelling feet
- Cable management panel: 19" panel in 1U height to provide effective cable management
- Blank/ Vented panel: Panels to cover unused space at the front of the cabinet. Available in variant sizes
- Chassis runner
- Cage nut assembly

| Model | Capacity (U) | Height (mm) | Width (mm) | Depth (mm) | Packing Dimension (H*W*D) | Volume (CBM) |
|-----------|--------------|-------------|------------|------------|---------------------------|--------------|
| P/G4280FS | 42 | 2000 | 600 | 800 | 2035 x 612 x 812 | 1.0113 |

- * P = Perforated door, G = Glass door
- * Customized sizes available upon request